



Top view



Retaining ring rotating, not removable




ELESA original design VTT-SST-LP



4 Loss protection

P with plastic ball chain

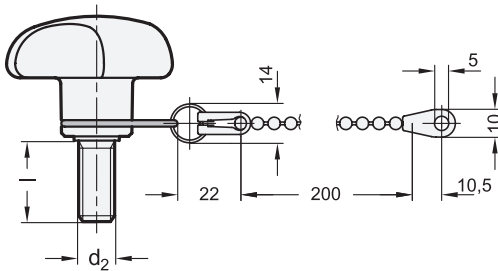

1

2

d ₁	d ₂	Length l	d ₃	h ₁	h ₂	h ₃	r	t min.
25	M 5	16	12	20	10	2,4	20	10
32	M 6	20	14	23	11,5	2,7	21	10
40	M 8	30	16	27	13,5	3,2	21,5	13
50	M 10	40	19	30	15	3,6	22,5	17

Specification

- Plastic
 - glass fiber reinforced
 - temperature resistant up to 60 °C
 - black, matte
- Bushing / threaded stud
Stainless Steel AISI 304
- Retaining ring / ball chain
Technopolymer (Polyacetal POM)
- Key ring
Stainless Steel
chemically blackened
- *Plastic characteristics* → Page 1483
- *Stainless Steel characteristics* → Page 1489
- RoHS

On request

- with bushing brass
- with threaded stud steel, zinc plated
- Plastic ball chains with other lengths

Information

Tristar knobs GN 5342.13 can be captively attached to a base element with the help of a ball chain.

The star knobs are supplied ready **assembled** (with a plastic ball chain).

see also...

- *Star knobs GN 6336.13 (with loss protection)* → Page 405
- *Star knobs GN 5773.13 (with loss protection)* → Page XYZ
- *Star knobs GN 5342 (with bushing)* → Page XYZ
- *Star knobs GN 5342 (with threaded stud)* → Page XYZ
- *More star knobs with loss protection GN 111.7* → Page 1426

How to order (Bushing)

GN 5342.13-40-M8-P

1	d ₁
2	d ₂
4	Loss protection

How to order (Threaded stud)

GN 5342.13-50-M10-40-P

1	d ₁
2	d ₂
3	Length l
4	Loss protection

1.1
1.2
1.3
1.4
2.1
2.2
2.3
2.4