





ELESA original design PMW.




Inox  
Stainless  
Steel

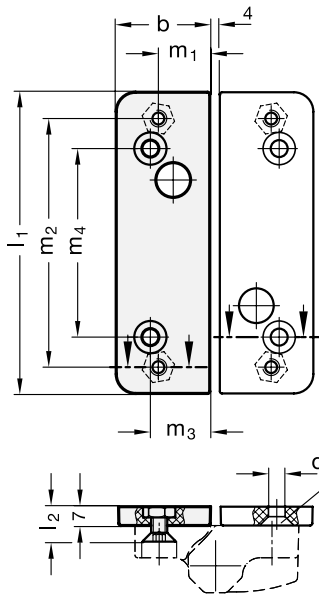

Assembly example

Bor for  
Countersunk screw  
DIN 7991



1

2

$l_1$	$m_3$	a Profile cross-section	b	d for screw	$l_2$ for GN 239.6 (with switch)	for GN 239.7 * (without switch)	$m_1$	$m_2$	$m_4$
110	14	30	28	M 6	12	14	19	91	73
110	16,5	35	28	M 6	12	14	19	91	72
110	19	40	28	M 6	12	14	19	91	70,6
110	21	45	34	M 6	12	14	19	91	69
110	24	50	34	M 6	12	14	19	91	69

\*only usable for GN 239.7-60-110

**Specification**

- Plastic  
Technopolymer (Polyamide PA)  
- glass fiber reinforced  
- temperature resistant up to 130 °C  
- black, matte
- Screws / Nuts  
Stainless Steel AISI 304
- *Stainless Steel characteristics* → Page 1489
- *Plastic characteristics* → Page 1483
- **RoHS compliant**

**Information**

Mounting plates GN 239.8 allow the installation of hinges GN 239.6 ... and 239.7-60-110 if the required spacing of the installation bore holes differs from the spacing of the hinge.

Their use is necessary if the unit is to be mounted on profile systems.

The required quantity of the mounting plates must be ordered depending on the desired installation spacing  $m_3$ . Two nuts and the appropriate countersunk screws are included.

see also...

- *Assembly sets for profile systems 30 / 40 GN 965* → Page 1428
- *Assembly sets for profile systems 30 / 40 / 45 GN 968* → Page 1438

How to order

**GN 239.8-110-24**

1  $l_1$

2  $m_3$