



Application example

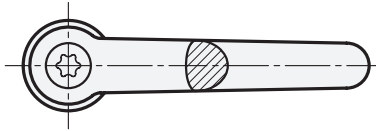

1 l_1	2 d_1	d_2	d_3	d_4	h_1	h_2	h_3	h_4 Stroke	s	t min.
30	M 5	13	10	13	24,5	4	31	3,5	2,5	10
45	M 6	15	10	13	24,5	4	34	3,5	3	10
63	M 8	20	13,5	17,5	31	6,5	45	4	3,5	13
78	M 10	25	16	21	36	8	54	4	4	16

Specification

- Handle
Zinc die casting
- Plastic coated
black, RAL 9005, textured finish **● SW**
orange, RAL 2004, textured finish **● OS**
red, RAL 3000, textured finish **● RS**
silver, RAL 9006, textured finish **● SR**
- Threaded bushing and retaining screw
Steel, blackened
- Washer
Steel
- case hardened
- blackened
- RoHS

3

Information

Adjustable hand levers GN 307 are ideal whenever parts have to be clamped in a confined space or in a particular lever position. On releasing the handle the serrations re-engage automatically.

When pulling the handle, the serration frees itself and can be re-located into any required position. Engagement is achieved by „releasing“ the lever.

The washer cannot be removed and does not turn when the lever is actuated. It protects the clamped surface from damage. One typical application is to use the hand lever for slotted holes.

see also...

- Adjustable hand levers GN 300 (without washer) → Page 318
- Adjustable hand levers GN 300.4 (with increased clamping force) → Page 332
- Adjustable hand levers GN 303 (with push button) → Page 328

How to order

GN307-63-M8-SW

1	l_1
2	d_1
3	Color

1.1
1.2
1.3
1.4
2.1
2.2
2.3
2.4

